
Adgressor[®] & Adgressor[®] with EcoFlex[™] System

Rider Scrubbers











Adgressor[®] & Adgressor[®] with EcoFlex[™] System

Rider Scrubbers

Flexibility for every kind of clean.


The Advance Adgressor[®] rider-scrubber with EcoFlex[™] System lets you clean green and still meet the highest expectations for clean floors. With the industry's most flexible floor-scrubber technology, you can develop a sustainable cleaning routine and quickly adjust to whatever the job demands. Be prepared to get more out of your budget, clean with less impact to the environment and maintain clean floors when you do.

Operators can quickly and easily select the right blend of pad pressure, water and detergent to tackle any cleaning challenge. Here are just a few of the flexible cleaning modes:

- Water Only Perfect for removing surface dirt and maintaining the clean look of floors. Water-only mode eliminates the impact of detergents on the environment and reduces cleaning costs.
- **Ultra-low Detergent** Well suited for routine cleaning where a small amount of green-certified detergent will do the trick. Water and detergent are dispensed separately at the scrub deck, eliminating solution waste.
- **Standard Detergent** The tough cleaning you expect. At standard detergent, pad pressure and flow rate, you'll have a combination powerful enough to pull stubborn dirt, grease, and oil from the surface.
- **Burst of Power** For deep, restorative cleaning or unexpected challenges. EcoFlex's burst of power temporarily increases your machine's pad pressure, detergent use and flow rate at the touch of a button.

The Adgressor is designed as a true industrial rider scrubber with reliability, productivity, and ease of use and maintenance built in. Combining large scrub decks and solution capacities with maneuverability and speed, the Adgressor delivers high productivity. A steel chassis and metal bumpers stand up to tough operating environments while thick high density polyethylene tanks will not dent, crack, or corrode.

The Adgressor with EcoFlex System delivers the flexibility to clean your floors more efficiently. By using a system that cleans like you do, you'll reduce your cost to clean and create a more sustainable cleaning program.

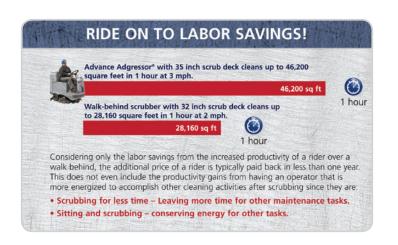

Ideal applications include:

- Food and Beverage
- Distribution/Warehousing
- Manufacturing
- Large Retail/Malls
- Transportation Facilities
- Stadiums and Arenas
- Municipalities
- Universities

u.

ш

z

ш

മ

AND

ഗ

ш

2

⊲

ш

Government Buildings

Available with EcoFlex[™] System

system

One-Touch[™] electronic function controls are conveniently located to keep operation simple and safe.

"Quick Change[™]" scrub deck interchange system provides eight unique decks for one standard machine!

Easy access to batteries and other components assures minimal down time.

Low sound level 68 dB A, permits operation anywhere, anytime.

Flexibility to custom fit your application

Best in class productivity

Easy to use – Easy to maintain

The most machine for your cleaning dollar



Technical Specifications			
Model	Adgressor [®] 3220	Adgressor [®] 3520	Adgressor [®] 3820
Scrub Path	32 in (81 cm)	35 in (89 cm)	38 in (97 cm)
Max. Productivity at 4.0 mph	56,320 ft²/hr	61,600 ft²/hr	66,880 ft²/hr
Max. Productivity at 2.5 mph	35,200 ft²/hr	38,500 ft²/hr	41,800 ft²/hr
Solution Tank	42 gal (157 L)	42 gal (157 L)	42 gal (157 L)
Recovery Tank	42 gal (157 L)	42 gal (157 L)	42 gal (157 L)
Brush Drive			
Disc –	1.5 hp (1)	0.6 hp (3)	0.6 hp (3)
Cylindrical –	Two 0.75 hp, 560 Wa	att motors on opposing e	nds, poly-V belt brush drive
Scrub Deck			
Disc –	Manual-adjusting side skirts contain solution		
Cylindrical –	Includes hopper for collecting small litter. Auto-adjusting side skirts contain solution		
Brush Speed	Disc 250 rpm, Cylindrical 900 rpm		
Brush Pressure	Programmable 3 settings up to 250 lb (113 kg)		
Drive System	1.5 hp motor with gear transmission, band brake and dynamic braking.		
	Programmable speeds up to 4.5 mph (7.3 kph)		
Gradeability	Transport - 20% / 11.5 deg., Working (scrubbing) - 8% / 4.6 deg		
Min. Turn-around Aisle Width	63 inch (160 cm) with a 32 inch deck		
Voltage	36 Volt for more power and longer run time		
Power Source	310 Ah or 420 Ah wet or 312 AGM maint-free battery options		
Battery Charger	Option of shelf or onboard charger		
Solution Control Cycles – All Models	Smart Solutions [™] is standard providing better water and chemical utilization and fewer dump and refill		
Vacuum Motor	0.75 hp 3-stage with optional dual vacuum		
Sound Level	68 dB A at operator's position		
Frame Dimensions	Length = 61 in (155 cm), Width = 32 in (82 cm), Height = 53 in (135 cm) – All Models		
Squeegee Width	36.6 in (93 cm) 42.1 in (107 cm) 45.1 in (115 cm)		
Weight	Machine Only 657 lb (298 kg). With full tank and standard batteries 1,553 lb (705 kg) – All Models		
Optional Adgressor [®] EcoFlex [™] System		-	Ē
Specifications			
Solution Flow Pump			
Dilution Ratios	32:1, 50:1, 64:1, 100:1, 128:1, 150:1, 200:1, 256:1, 300:1		
Refillable Cartridge Capacity	1.25 gal (4.75 L)		
Battery Watering System			

Specifications are subject to change without notice.

Adgressor[®] & Adgressor[®] with EcoFlex[™] System

Delivering Clean and Safe Floors Daily.

Optional Accessories:

- Right side edging broom
- Headlight kit
- Safety strobe light kit
- Cool Tool[™] Scrub & Vac[™] kit
- Dual Vac kit
- Onboard Charger
- Battery water level indicator
- Dual Arm Rest kit

Ask about our leasing options.

©2014 Nilfisk, Inc. Form L1567A 3-3-14

- Seat Belt kit
- Rear Scrubber Compound Tires
- Oil-resistant neoprene, squeegee and scrub deck blades
- Full range of brushes and pad holders for light to aggressive scrubbing

9435 Winnetka Avenue North Brooklyn Park, MN 55445 www.advance-us.com Phone 800-214-7700 Fax 800-989-6566

240 Superior Boulevard Mississauga, Ontario, Canada L5T 2L2 www.nilfisk-advance.ca Phone 800-668-8400 Fax 800-263-5111





www.advance-us.com/industrial

