

# SW8000™

## Rider Sweeper



# Advance

## FACT SHEET



### Superior Dust Control and Productivity...

The Advance SW8000™ is unsurpassed in indoor and outdoor power sweeping. A 50 inch main broom – the widest in this sweeper class – combined with full time dust controlled dual side brooms\*, creates an incredible 77 inch sweep path.

On conventional rider sweepers, dust is controlled at the main broom only. The side brooms, the biggest source of dust, must be raised in open areas when fugitive dust is a concern. The SW8000 is not a conventional machine. The innovative DustClear™ Five Stage Dust Control System allows for full time use of the dual side brooms by controlling dust along the entire sweep path – including the side brooms. Productivity is then increased by over 70% compared with conventional sweepers that control dust only at the main broom.

With superior dust control, innovative safety features, low maintenance costs, and ease of operation, the Advance SW8000 takes power sweeping to the next level.

\* Optional features

**MaxAccess™** – Minimizes downtime and maximizes efficiency, reliability and longevity through quick and easy access to all engine and hydraulic components.

**Easy To Operate** – One-Touch™ controls and a single foot pedal controls direction plus activates the brooms and dust control system and offers the operator the easiest machine to use in the industry.

**Clear-View™** – Offset hopper allows the operator to view the side broom and the area in front of the sweeper without having to lean outside the frame of the machine making it safer and more comfortable to use.

**Operator Safety** – Hopper safety arm is controlled from the operator's compartment. Operator is safe from moving parts through the interlocking engine cover. Impact-adsorbing roto-molded body structure and 5 mph bumper provides the ultimate in operator safety.

## Kubota

### POWERED

- Quiet, smooth operation
- Superior reliability with enclosed gear driven valve train
- Reduced maintenance costs – No timing belts or chains
- Global service network

### OPTIONAL ACCESSORIES

- Left Side Broom
- DustGuard™ Side Broom "Fog" System
- Litter Vac
- Fire Extinguisher
- Hopper High Temp Sensor
- Raised Air Intake
- Foam Filled Tires
- Backup Alarm
- Brake / Turn Signals
- Work Lights
- Amber Strobe
- Overhead Guard
- Fully Enclosed Cab with Optional Pressurizer, Heater, and A/C
- Suspension Seat with Arm Rest
- Floor Mat
- Metal Hopper Liner
- Seat Belt
- Tilt Steering Wheel
- Clogged Filter Indicator
- Side Broom Guards and Heavy Duty Front Grill
- Side Broom Speed Adjustment

### TYPICAL APPLICATIONS INCLUDE

- Manufacturing Plants
- Warehouses
- Cement, Brick and Block Facilities
- Contract Cleaners
- Rental Centers
- Parking Garages
- Surface Lots
- Municipal Parks
- Zoos / Amusement Parks

# Advance SW8000™


## Rider Sweeper




The optional all weather cab keeps the operator comfortable and productive. Clear-View™ window in the cab provides a safe view of the right side broom.




MaxAccess™ allows faster repairs and less downtime so the sweeper spends less time in the shop and more time sweeping.



Ultra-Web® dust filter is >98% efficient on 0.3 - 1 micron dust. All dust is locked in the hopper behind only 1 critical seal incorporated in the dust filter. Captured dust is shaken directly back into the hopper.

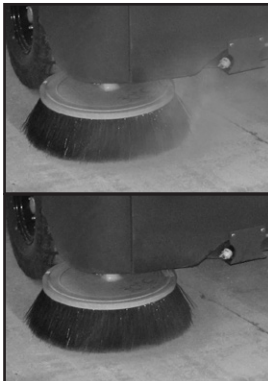

DustGuard™ suppresses side broom generated dust allowing continuous use, and increasing, dust controlled productivity by over 70%.

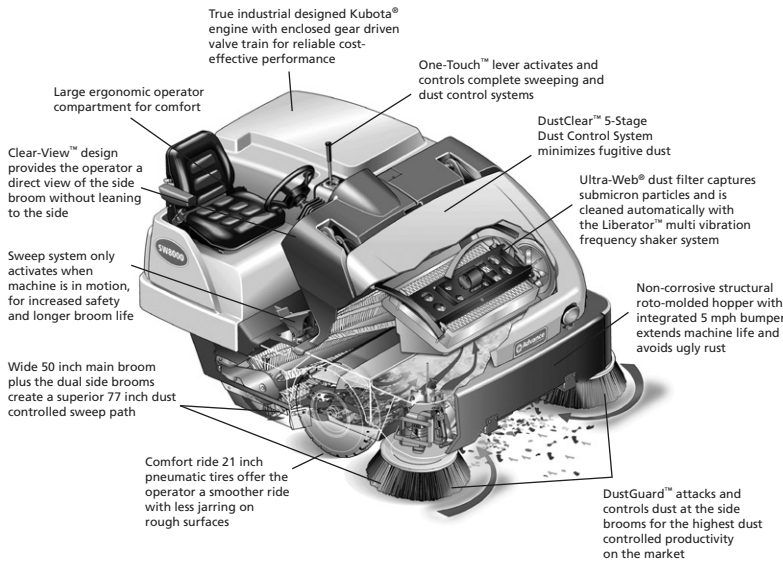

## Industrial Strength Solutions...

- Our products are designed using innovative technology that increases productivity and drives down the cost to clean.
- You can get expert service and maintenance for your Advance machines from factory-trained personnel around the world. Fast parts delivery, too.
- Maintain peak performance with Nilfisk Genuine OEM Parts.

Nilfisk Genuine OEM Parts

## Technical Specifications

| Models   | SW8000™ 4 cyl   |
|--|---|
| <b>Sweeping System</b>                           |   |
| Cleaning Path - Single Side Broom                | 65 in (165 cm)  |
| Cleaning Path - Dual Side Brooms                 | 77 in (196 cm)  |
| Main Broom Length                                | 50 in (127 cm)  |
| Side Broom Diameter                              | 26 in (66 cm)   |
| <b>Debris Hopper</b>                             |   |
| Volume   | 14 ft <sup>3</sup> (396 L)  |
| Dump Height                                      | 60 in (152 cm)  |
| <b>DustClear™ Five Stage Dust Control System</b> |   |
| <b>Stage 1</b> DustGuard™                        | Side broom "fog" system 14 gal (53 L)                                       |
| <b>Stage 2</b> Vacuumized Main Broom Chamber     | Captures all dust kicked up from the main broom                             |
| <b>Stage 3</b> Airflow Labyrinth                 | Removes 90% of dust from the air stream                                     |
| <b>Stage 4</b> Ultra-Web® Nanofiber Filter       | >98% efficient on 0.3 - 1.0 micron particles                                |
| <b>Stage 5</b> Airflow Restoration System        | Liberator™ aggressive, multi frequency vibration filter shaker              |
| <b>Power System</b>                              |   |
| Engine   |   |
| Gasoline/LPG (Propane)                           | Kubota®, 1.6 L, 55 hp, EPA Tier II and CARB Tier III certified              |
| Diesel   | Kubota®, 1.5 L, 35.5 hp, meets EPA emission standards under 40 CFR 1039.625 |
| Ramp Climbing                                    |   |
| Transport  | 20% 11.3°   |
| Sweeping   | 20% 11.3°   |
| <b>Dimensions</b>                                |   |
| Tires  |   |
| Front (2)  | 21 in (53 cm) pneumatic   |
| Rear   | 18 in (46 cm) pneumatic   |
| Aisle U-turn (left)                              | 109 in (277 cm)   |
| Length   | 95 in (241 cm)  |
| Width  | 64 in (163 cm)  |
| Height without OHG                               | 59 in (150 cm)  |
| Height with OHG                                  | 82 in (208 cm)  |
| Height with Cab                                  | 79 in (201 cm)  |
| <b>Net Weight</b>                                | 3,050 lb (1,383 kg)   |
| <b>Sound Level</b>                               | Below 80 dB A at operator's position (gasoline and LPG)                     |
| <b>Safety Test Lab Label</b>                     | ETL   |

Specifications are subject to change without notice.



14600 21st Avenue North  
Plymouth, MN 55447-3408  
www.advance-us.com  
Phone: 800-214-7700  
Fax: 800-989-6566

240 Superior Boulevard  
Mississauga, Ontario, Canada L5T 2L2  
www.nilfisk-advance.ca  
Phone: 905-564-1149 or 800-668-8400  
Fax: 905-564-1030 or 800-263-5111



©2013, Nilfisk-Advance, Inc.,  
Printed in U.S.A., Form L3289A 4-13

