

Aquamatic Selectric™

Automatic Carpet Extractor



Advance
by Nilfisk-Advance

FACT SHEET



STANDARD FEATURES INCLUDE

- Touch and Go™ electronic controls
- Four speeds forward and reverse
- 25 gallon (94 L) solution tank
- Center steering caster
- 75 foot (23 m) detachable power cord

TYPICAL APPLICATIONS INCLUDE

- Hotels
- Restaurants
- Contract Cleaners
- Educational Institutions
- Healthcare Facilities
- Office Buildings

The Aquamatic Selectric™ carpet extractor is fast and easy to use. It leaves carpet clean and ready for traffic in no time at all. Set your speed, squeeze the hand grips and the Selectric power scrubs and vacuums an 18 in (46 cm) path, extracting at a rate of 5,400 ft² (500 m²) an hour.

Compact size and self-propelling drive makes the Aquamatic Selectric™ easy to maneuver. Turns away from the wall without backing up because steering caster is up front. The low profile makes it easy for operators to see what they're maneuvering around.

Touch & Go™ electronic controls govern the working speed. Just choose from four forward speeds or four reverse. Set your speed, squeeze the grips and go. Operation is that easy.

The "tank in tank" design makes for maximum productivity. Recovery automatically stops when tank is full.

The Aquamatic Selectric™ with the floating action of its cylindrical brush and vacuum pick-up shoe cleans uneven floor surfaces too. Single wide-angle spray nozzle has large orifice, less down time.

Cord electric power means the Aquamatic Selectric™ will keep working as long as you want to. It also means the Selectric is light enough to be lifted by two people into a truck or van, so it's portable. Check out the many other features of this labor saving money maker.

The Aquamatic Selectric™ can also be used with a variety of optional hand tools for cleaning stairs or other hard to reach places.



Advance Aquamatic Selectric™


Automatic Carpet Extractor



Touch & Go™ controls are easy to use. Choose from four forward speeds and four reverse, squeeze the hand grips and go.




Tight turns are no problem. A front steering caster and self-propelling drive make it easy to extract even in congested areas.

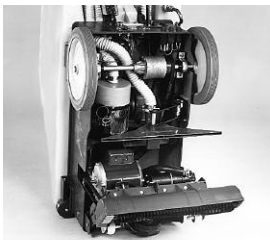

Designed for easy access to service areas, the Selectric stands on end for fast access to components.



Both solution and recovery tanks drain completely. Dump and refill times are kept to a minimum.

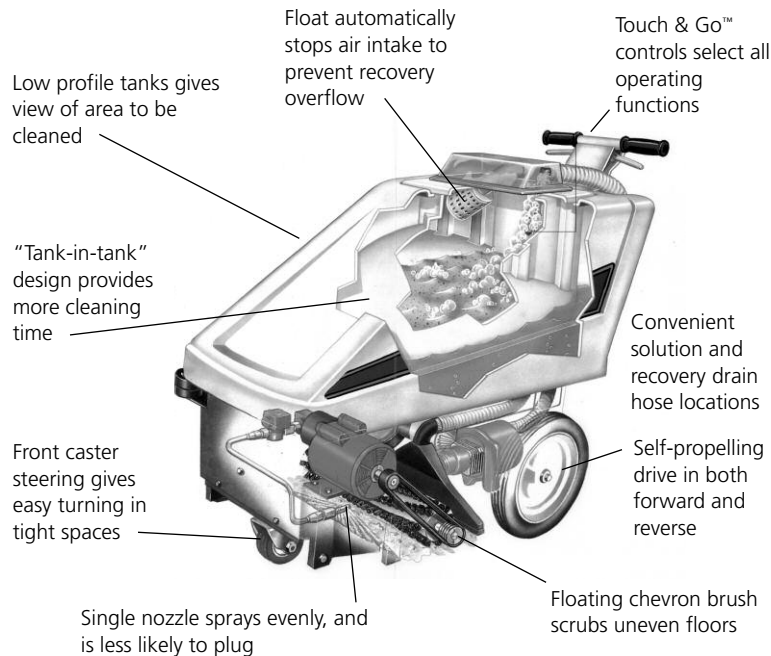

Defining Cleaning Innovation...

- Our products are designed using innovative technology that increases productivity and drives down the cost to clean.
- You can get expert service and maintenance for your Advance machines from factory-trained personnel around the world. Fast parts delivery, too.
- Maintain peak performance with Nilfisk Genuine OEM Parts.

Nilfisk Genuine OEM Parts

Technical Specifications

Drive Motor	120 V/60 hz, 0.1 hp, 0.6 amp motor with belt drive to differential.	Vacuum Motor	120 V/60 hz, 1.5 hp, 10 amp, three-stage by-pass design. 99 cfm (2,800 L/min) with 2 in (5 cm) orifice. 117 in (297 cm) sealed waterlift.
Speed Control	Touch & Go™ electronic control panel with LED lights located on the top of the handle assembly gives speed selection as well as travel direction.	Vacuum Shoe	20 in (51 cm) wide, stainless steel on floating mount.
Travel Speeds	Four speeds forward and reverse.	Cleaning Path	18 in (46 cm)
Power Cable	Detachable 75 ft (22.5 m) 14/3 wire	Recovery Tank	15 gal (56 L) polyethylene, with float system to prevent overflow when tank is full. Drain hose is located at the rear of machine.
Power Draw	Max amp draw – 14.5 amps.	Dimensions	Length – 46 in (117 cm) Width – 21 in (53 cm) Height – 39 in (100 cm)
Brush Motor	1/3 hp, 120 V/60 hz, 3.5 amp, reversing motor, totally enclosed.	Weight	Net – 199 lb (90 kg) Shipping – 229 lb (104 kg)
Brush Drive	Poly-V belt	Part Number	56 263 501
Brush	18 in (46 cm) long, 3 in (8 cm) diameter, nylon bristle with chevron pattern turns at 1,200 rpm. Floatation mounted, with foot operated brush-lift lever.		
Solution Tank	25 gal (95 L), polyethylene.		
Solution Pump	diaphragm pump, rated 0.78 gpm (3 L/min) at 60 psi (4 bar)		
Solution Control	Automatic control in forward with an electric solenoid activated by squeezing the hand levers. Automatic shut-off in reverse. Single nozzle spray.		

Specifications are subject to change without notice.



Advance
by Nilfisk-Advance

14600 21st Avenue North
Plymouth, MN 55447-3408
www.advance-us.com
Phone: 800-850-5559
Fax: 800-989-6566

396 Watline Avenue
Mississauga, Ontario, Canada L4Z 1X2
www.nilfisk-advance.com
Phone: 800-668-8400 or 905-712-3260
Fax: 800-263-5111 or 905-712-3255

©2006, Nilfisk-Advance, Inc.,
Printed in U.S.A., Form L0980A 7-06